





ENHANCING SAFETY LEVELS  
TO PROTECT PROPERTY AND  
SAVE LIVES.

# ArmaProtect ABLF

Flexible acrylic firestop filler mastic for mixed fire  
seals and joints in walls and floors

- // Blank openings
- // Mixed and multiple services
- // Cables, cable bundles and cable trays
- // Conduit and conduit bundles
- // Non-combustible and combustible pipes
- // Structural joints in indoor and outdoor areas
- // For sealing connections and joints with moderate expansion stress  
and without constant exposure to moisture

[www.armacell.com](http://www.armacell.com)

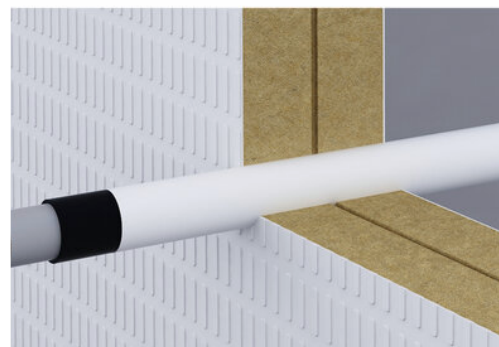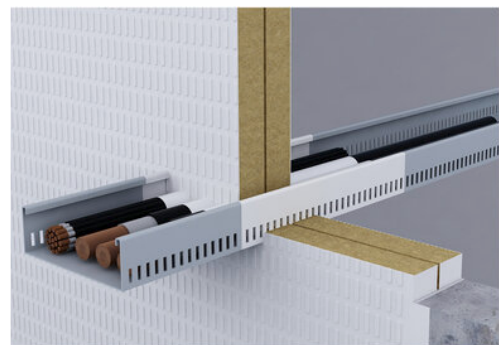

 **armacell**<sup>®</sup>  
ArmaProtect<sup>®</sup>

INSTALL IT. ENSURE SAFETY.

---

# ArmaProtect™

Passive fire protection (PFP) products and systems are designed to provide fire-safe circumstances in the event of a fire emergency. Often built as part of the building component, PFP measures are not visible to building users and hence often overlooked as a fire protection measure.



## // Fire safety is top priority

The requirements for fire protection are increasing. Regulated by building codes, buildings are sub-divided in fire compartments. In the event of a fire, they keep fire and smoke contained in a limited area for a given amount of time. Fire ratings typically range from 30 to 120 or even up to 240 minutes

ArmaProtect firestop products reliably seal off penetrations in walls, floors or service shafts and keep escape routes free of smoke and toxic gases. This gives occupants valuable time to leave the building and rescue teams unhindered access for evacuation.

## // One-stop-shop solution

Whether flexible walls, rigid wall or rigid floors with cable and pipe penetrations – Armacell offers specifiers and installers compliant solutions for almost all firestop penetrations.

The range includes intumescent firestop wraps, firestop collars, coated firestop boards, intumescent firestop sealants and mortars.

The ArmaProtect portfolio is an ideal addition to ArmaFlex Protect, Armacell's unique firestop solution which combines high fire resistance, condensation control and thermal insulation in a single product.

**SOLUTIONS  
WITH EN TESTING  
(ETA)**

# The firestop portfolio from Armacell

Firestop penetration seals with cables, conduits, combustible and non-combustible pipes for residential, commercial and industrial building.

- ✓ Specifiable, reliable and flexible –  
**for each firestop application in residential, commercial and industrial buildings**
- ✓ Cost efficient solution –  
**the ideal choice for specifiers**
- ✓ Easy to install and maintain –  
**perfectly designed for the need of installers**
- ✓ Easy to inspect –  
**compliant solutions to fulfill the expectations of firestop inspectors**
- ✓ Firestop solutions for cable, pipe and mixed penetrations –  
**globally tested with European Technical Assessments and tested UL systems**
- ✓ Full approval range from small to large openings –  
**covering customer's requirement on the job sites**



**ArmaProtect EXPS**  
Firestop sealant



**ArmaProtect FW2 & FW3**  
Firestop wrap



**ArmaProtect FC1 & FC2**  
Firestop collar



**ArmaProtect CB**  
Coated firestop board  
(includes **ArmaProtect ABLC**  
Firestop coating and  
**ArmaProtect ABLF**  
Firestop filler mastic)



**ArmaProtect CM**  
Firestop mortar



**ArmaProtect CT**  
Firestop cable tube



**ArmaProtect EFC1 & EFC2**  
Endless firestop collar

TECHNICAL DATA - ARMAPROTECT ABLF

|                                          |                                                                                                                                                                                                                  |  |                          |
|------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--------------------------|
| Brief description                        | ArmaProtect ABLF is an ablative firestop filler mastic that maintains the fire resistance performance of fire penetrations in walls and floors.                                                                  |  |                          |
| Material type                            | Ablative firestop filler mastic.                                                                                                                                                                                 |  |                          |
| Additional material information          | ArmaProtect ABLF is halogen and solvent-free.                                                                                                                                                                    |  |                          |
| Product colour range                     | White                                                                                                                                                                                                            |  |                          |
| Applications                             | ArmaProtect ABLF use for linear joints and gap sealing as well as for coated mineral wool boards (ArmaProtect CB).                                                                                               |  |                          |
| Installation                             | For professional use only. Refer to third party published listings, national approvals / assessments and Armacell’s product literature for specific application details as well as before handling this product. |  |                          |
| Approvals and compliance                 |                                                                                                                                                                                                                  |  |                          |
| Specification compliance                 | • UL acc. UL 1479 (ASTM E814) • ETA-22/0063 acc. EN 1366-3                                                                                                                                                       |  |                          |
|                                          |                                                                                                                                                                                                                  |  |                          |
| Property                                 | Value / Assessment                                                                                                                                                                                               |  | Standard / Test method   |
| Operating temperature                    |                                                                                                                                                                                                                  |  |                          |
| Operating temperature                    | -40 °C to +70 °C [-40 °F to 158 °F]                                                                                                                                                                              |  |                          |
| Processing Temperature                   |                                                                                                                                                                                                                  |  |                          |
| Processing temperature                   | 5°C to 25°C (41°F to 77°F)                                                                                                                                                                                       |  |                          |
| Fire Performance and Approvals           |                                                                                                                                                                                                                  |  |                          |
| Reaction to fire                         | Class E                                                                                                                                                                                                          |  | EN 13501-1               |
| Use category                             | Type X: intended for use in conditions exposed to weathering                                                                                                                                                     |  | EOTA TR 024              |
| Passive fire protection                  |                                                                                                                                                                                                                  |  |                          |
| Fire resistance of structural element    | UL approved system: FT-Rating - up to 3 hours                                                                                                                                                                    |  | ANSI/UL 1479 (ASTM E814) |
| Physical attributes                      |                                                                                                                                                                                                                  |  |                          |
| Density                                  | 1.34 - 1.48 g/cm³ (at 20 °C)                                                                                                                                                                                     |  |                          |
| Health and environment                   |                                                                                                                                                                                                                  |  |                          |
| Volatile organic compounds (VOC) content | < 50 g/l                                                                                                                                                                                                         |  |                          |
| Other technical features                 |                                                                                                                                                                                                                  |  |                          |
| Shelf life                               | Can be kept for at least 18 months unopened if stored properly.                                                                                                                                                  |  |                          |
| Storage                                  | Store / Transport in a cool and dry place with an ambient temperature of 5 °C to 25 °C (41°F to 77°F) and protect from frost.                                                                                    |  |                          |

All data and technical information are based on results achieved under the specific conditions defined according to the testing standards referenced. Despite taking every precaution to ensure that said data and technical information are up to date, Armacell does not make any representation or warranty, express or implied, as to the accuracy, content or completeness of said data and technical information. Armacell also does not assume any liability towards any person resulting from the use of said data or technical information. Armacell reserves the right to revoke, modify or amend this document at any moment. It is the customer's responsibility to verify if the product is suitable for the intended application. The responsibility for professional and correct installation and compliance with relevant building regulations lies with the customer. This document does not constitute nor is part of a legal offer to sell or to contract.

At Armacell, your trust means everything to us, so we want to let you know your rights and make it easier for you to understand what information we collect and why we collect it. If you would like to find out about our processing of your data, please visit our Data Protection Policy.

© Armacell, 2026. All rights reserved. Trademarks followed by ® or ™ are trademarks of the Armacell Group.

ArmaProtect | ArmaProtect ABLF | TDS | 072026 | en-GB

## ABOUT ARMACELL

---

As the inventor of flexible foam for equipment insulation and a leading provider of engineered foams, Armacell develops innovative and safe thermal and mechanical insulation solutions that create sustainable value for its customers. Armacell's products significantly contribute to driving energy efficiency worldwide. With more than 3,100 employees and 26 production plants in 20 countries, Armacell operates two main businesses, Advanced Insulation and Engineered Foams. Armacell focuses on insulation materials for technical equipment, high-performance foams for acoustic and lightweight applications, recycled PET products, next-generation aerogel technology and passive fire protection systems.



For more information, please visit:  
[www.armacell.com](http://www.armacell.com)